




**MITSUBISHI
ELECTRIC**

AIR CONDITIONING SYSTEMS

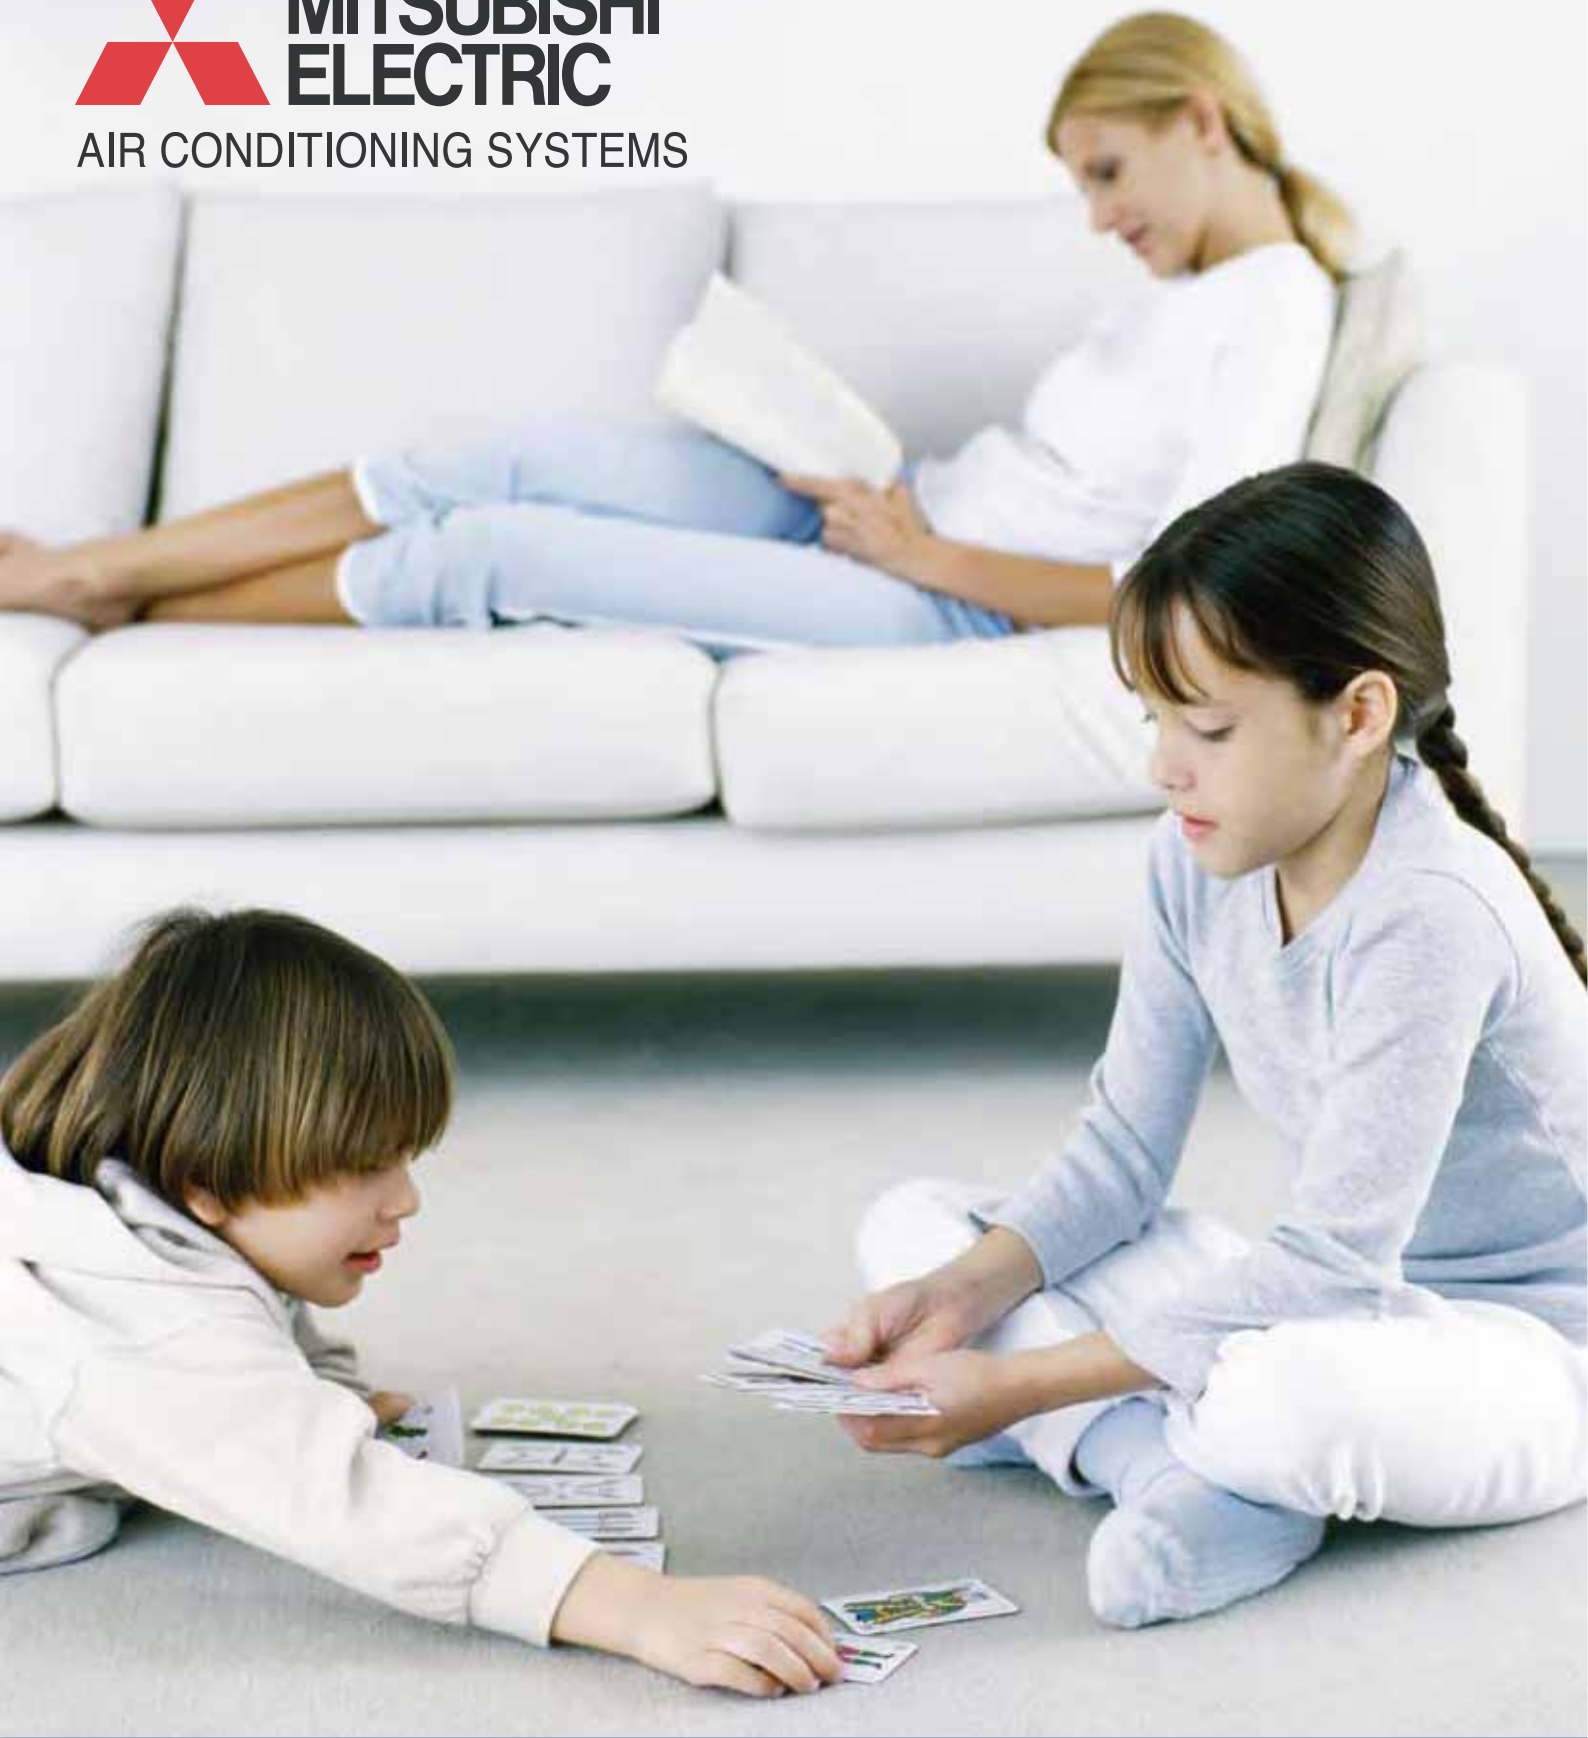

**Quality that brings
comfort to life!**




Mitsubishi Electric – Quality that brings comfort to life!

Are you looking for an energy efficient system that provides warm, even heat in winter and cool comfort in summer? The answer lies in reverse cycle air conditioning from Mitsubishi Electric.

Mitsubishi Electric has a model for you. Stylish lines for the living room, quiet operation, for the bedroom. Designed for comfort, durability, health and efficiency, advanced air control from room to room. Mitsubishi Electric – quality that brings comfort to life.

Higher performance, lower power consumption and longer life.

When it comes to comfort, efficiency and durability, Mitsubishi Electric has a distinct advantage over the opposition, we call it MEQ – Mitsubishi Electric Quality. Simply put it is a superior standard that we apply to our own business. While other systems may meet stringent industry standards, Mitsubishi Electric continually strives to exceed them. MEQ delivers air conditioning systems at the leading edge of technology that operate efficiently in extreme weather conditions, year in, year out.



MEQ gives us 3 important advantages:

Comfort: We have created products that are designed to provide you with exceptional comfort in your surroundings, in all weather conditions.

Efficiency: We strive for the perfect balance of performance, reliability, low power consumption and a long operational life span for all our products. The result is an air conditioning range that is rated amongst the best in the industry in terms of design, quality and energy efficiency.

Durability: We subject the indoor and outdoor units of all our systems to rigorous durability testing, which includes harsher temperature extremes than are likely to be found anywhere in the world. This allows us to produce higher quality products that protect your investment through years of reliable service.





The Mitsubishi Electric Story.

Our commitment to quality, service, research and development has helped us gain a leading position in today's marketplace.

Mitsubishi Electric have a proud history in the manufacturing and supply of leading edge electrical and electronic equipment for both domestic and commercial use. Our efforts to make indoor life more comfortable began in 1921, with the introduction of our first electric fan which became an instant hit. Some 10 years later we began to manufacture coolers, which were just as popular.

Since then our understanding that technology is the driving factor of change in our lives has seen us become a world leader in energy efficient air conditioning systems. However our development of breakthrough technologies and products is not just restricted to heating and cooling.

Since 1980 to the present day the pace at which Mitsubishi Electric has introduced and refined products that benefit society, industry and individuals, has been nothing less than astonishing.

These technologies include the world's first large scale LED Screen for sports arenas, the world's largest CRT

television screen for the consumer market, the world's first spiral escalator, the world's fastest elevators, the antenna technology behind the world's first in-flight internet service, solar cell technology and much more. Today Mitsubishi Electric is a global giant with operations in over 35 countries, with more than 97,000 employees.

Our commitment to quality service, research and development has helped us gain a leading position in today's marketplace in a wide variety of areas including heating, cooling and air conditioning. Mitsubishi Electric's *'today technology'* provides climate controlled comfort wherever you live, work and relax.

Whether it's consistent heating and cooling for the home or office, Mitsubishi Electric offers you state-of-the-art technology that is quiet, simple to use, reliable and above all, energy efficient.



What features do you need to look for? MITSUBISHI ELECTRIC GIVES YOU THE EDGE!

Energy Saving

Less consumption, more efficiency and extra comfort – the ideal solution


INVERTER TECHNOLOGY FOR EVEN MORE ENERGY SAVINGS



Mitsubishi Electric's Advanced Technology Inverter Systems are more economical and efficient than conventional systems.

Conventional non-inverter systems run at a fixed speed. To maintain a set temperature the compressor switches on/off so room temperatures continually fluctuate, falling, rising and falling again.

To overcome this problem Mitsubishi Electric's advanced inverter technology gently increases or decreases power to suit the prevailing conditions reaching the desired temperature quicker, more efficiently without severe temperature fluctuations.

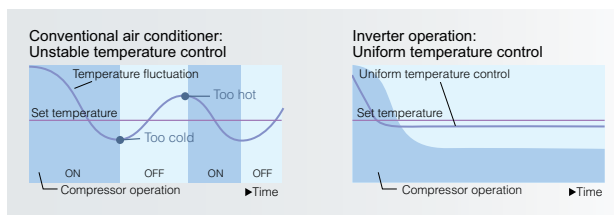

The resulting reduction in electricity consumption by our energy saving technology not only saves you money but also reduces your carbon footprint on the environment.

Mitsubishi Electric's Outdoor Inverter units have been aesthetically designed to minimise their visual impact on your environment.

Each contains a number of innovative features that makes them quieter, more energy efficient and reliable, placing them at the cutting edge in the industry.

"i save" Mode



"i save" is a simplified setting function that recalls a preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice to immediately return to the previous temperature setting. Using this function contributes to energy savings when, for example, leaving the room or going to bed.

* Temperature can be preset to 10°C when heating in the "i save" mode (except when connected to MXZ-8A140VA).



I-SEE SENSOR

The "i-see Sensor" automatically moves from side to side, searching the floor temperature over a wide area of 150°.


Conventional air conditioners control indoor temperature by using only the temperature of the intake air at the top of the room. As a result, the floor level temperature, which has a big impact on the temperature that people feel, tends to be overlooked. The "i-see Sensor" detects the floor temperatures to ensure ongoing comfort in the living areas.

New Remote Controller

MSZ-GE 60/71/80 Series air conditioners are equipped with a new weekly timer function. Now you can easily set desired temperatures and operation start/stop times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Easy set-up using dedicated buttons

The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.

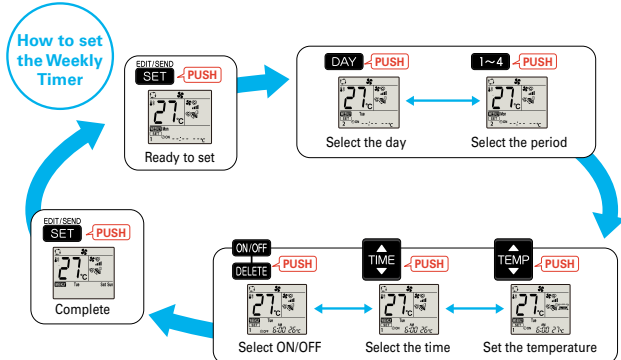

"Econo Cool" Energy-Saving Feature

This intelligent temperature control feature – that adjusts airflow direction to the body depending on air outlet temperature – allows set temperatures to be raised by 2 degrees without any loss in comfort for a 20% gain in energy efficiency.



* Available only during manual cooling operation.

	Conventional	Econo Cool
Ambient temperature	35°C	35°C
Set temperature	25°C	27°C
Perceived temperature	30°C	29.3°C

Quick Clean



The easily detachable front panel is a snap to wash, and the airflow vents can be opened without any special tools for quick cleaning inside the air conditioner. It is recommended that the air conditioner be cleaned regularly, to increase operating efficiency and energy savings.



The inner fan is placed within easy reach, for regular cleaning.

Clean, comforting air

A fresh and healthy ambience is always yours to enjoy


Plasma Deodorizing Filter

(MSZ-FB Series)



The newly equipped "Plasma Deodorising Filter" provides state-of-the-art deodorisation-decomposition and elimination of harmful chemical substances at the nanolevel (1/1,000,000) of a millimetre). The key to high power deodorisation of the most unpleasant odours*¹ in daily life is the elimination of ammonia, methyl mercaptan, trimethylamine and hydrogen sulphide.

Plasma Deodorization's Effect on Ammonia

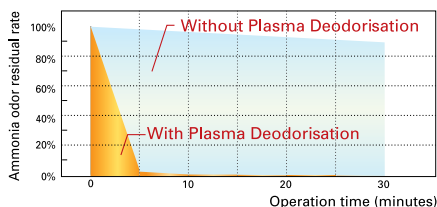


*¹ Not all odour components generated on a continuous basis (building material odours, pet odours) can be removed.

Nano Platinum Filter (MSZ-GE60/71/80)



This filter incorporates nano-sized platinum-ceramic particles that generate stable antibacterial and deodorising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Nano Platinum Filter of the MSZ-GE60/71/80 models better dust collection performance than conventional filters. The superior air-cleaning effectiveness increases room comfort yet another level.



*It is okay to wash the filter with water (air-cleaning effect is maintained)


Quiet operation

Hard at work and yet so quiet

Ultra Quiet Operation



Mitsubishi Electric has a long standing reputation for offering some of the quietest models in the industry. The new MSZ-GE range is no exception. The MSZ-GE25/35 is ultra quiet at only 19 dB(A) in Low Fan Speed and capable of maximum output. You want to feel the warmth, not hear it!

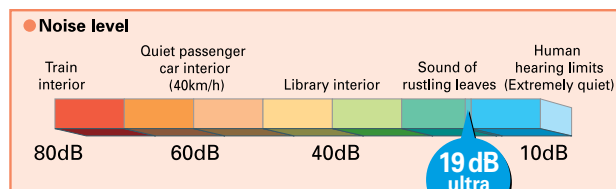

Sufferers from asthma, hay fever and other allergies will benefit greatly from our deluxe inverter *plasma duo* wall mounted models which feature state-of-art filtration

Plasma Air-Purifying Filter


(MSZ-FB Series)



Armed with the "Plasma Air Purifying Filter", which has already built up a solid reputation in Japan, the pollutants in your room air are removed more thoroughly than ever before. Besides collecting fine house dust, pollen and other annoying substances, this filter also provides disinfecting and anti-virus effects.*² Negative ions, with their soothing and relaxing effects, are also generated.

*² Source: KRCEB-Bio study Report No. 16 00865 (November 22, 2004)

Plasma Duo removes various things

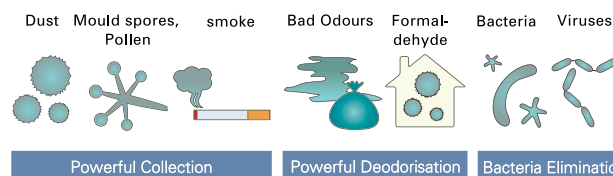

Anti-Allergy Enzyme Filter

(MSZ-GE60/71/80VA/MSZ-KA Series)




To counter allergens, we have added filters featuring artificial blue enzymes with the power to remove harmful microbes such as bacteria*¹, virus, dust mites, pollen, etc. The enzymes destroy any germs caught in the filter, preventing them from working their way further inside the air conditioner. However, being artificial enzymes, they prevent allergies whilst remaining gentle to humans.

*¹ Confirmed by the Japan Spinners Inspecting Foundation. Test numbers JSIF-029220-1/JSIF-029220-2.

Wide and Long Air Flow

The wide and long air flow mode allows airflow direction to be adjusted, ensuring every corner of the room is comfortable. The mode is simply activated at the touch of a button on your remote controller. The long mode extends air flow to reach even the furthest point of large living rooms or enables kitchens to be reached in an open plan environment. This mode is available on our larger capacity models MSZ-GE60, MSZ-GE71/MSZ-GE80.

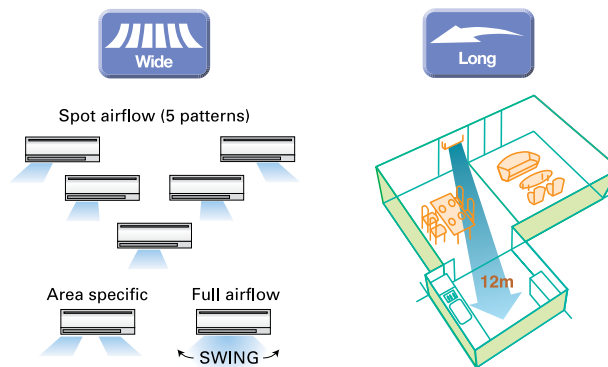

Product range

Wall Mounted

Deluxe Wall-mounted - Reverse Cycle
MSZ-FB Series



Star Rating

2.5kW	3.5kW	5.0kW
✓	✓	✓

DELUXE INVERTER

- Compact flat panel design
- Ultra quiet operation 20dB(A)*1
- Energy saving “i-see” temperature sensor
- Long life washable plasma deodorising filter
- Long life washable plasma air purifying filter
- Self cleaning “Ozone Shower”
- Quick clean design
- Energy-saving “Econo Cool”
- Auto change over
- Wireless remote controller with 24 hour timer
- **Optional wired controller includes a 7 Day Timer**

*1 MSZ-FB25

Wall-mounted - Reverse Cycle
MSZ-GE Series

Star Rating

2.5kW	3.5kW	5.0kW	6.0kW	7.1kW	8.0kW
✓	✓	✓	✓	✓	✓

NEW



MSZ-GE25/35/50VA



MSZ-GE60/71/80VA

INVERTER

- New panel design
- Ultra quiet operation at 19dB(A)*2
- Energy-saving “Econo Cool”
- Wide and long air flow*3
- Nano Platinum Filter*3
- “i save” mode
- Powerful Mode*3
- Quick-clean design
- Wireless remote controller with 24 hour timer or optional wired controller*4
- **New remote controller with inbuilt 7 Day Timer*3**

*2 MSZ-GE25/35

*3 MSZ-GE60/71/80

*4 MSZ-GE25/35/50

Compact Console

Compact Wall-mounted Console - Reverse Cycle
MFZ-KA Series



Star Rating

2.5kW	3.5kW	5.0kW
✓	✓	✓

INVERTER

- Slim line and compact design
- Quiet operation: 22dB(A)*6
- “i-save” mode for preferred setting
- Catechin filter
- Anti-allergy enzyme filter
- Energy-saving “Econo Cool”
- Swing and auto modes
- Auto change over
- Wireless remote controller with 24 hour timer
- **Optional wired controller includes a 7 Day Timer**

*6 MSZ-KA25

Ceiling Cassette/Bulkhead

Compact Ceiling Cassette - Reverse Cycle SLZ-KA Series



INVERTER

- Compact flat panel design
- Light weight design
- Long-life filter
- Fresh air intake
- Smudge-free airflow
- Auto change over

Star Rating



2.5kW	3.5kW	5.0kW
✓	✓	✓

- Auto vane
- Wireless controller, 12 hour timer
OR
Wired controller, includes 7 day timer

Compact Bulkhead - Reverse Cycle SEZ-KD VA Series



INVERTER

- Compact Design now 200mm high
- Long-life filter
- Air cleaning filter
- Auto change over

2.5kW	3.5kW	5.0kW	6.0kW	7.1kW
✓	✓	✓	✓	✓

- Wireless controller, 12 hour timer
OR
Wired controller, includes 7 day timer

Multi Series (Inverter Heat Pump)

	Wall Mounted	Floor Standing	Ceiling Suspended	Cassette	Bulkhead	Ducted
up to 5 indoor units MXZ-5B100VA 10.0kW	 MSZ-FB 25/35/50 MSZ-GE 22/25/35/50/60/71	 MFZ-KA 25/35/50	 PCA-RP 50/60/71	 SLZ-KA 25/35/50 PLA-RP 60/71	 SEZ-KD 25/35/50/60/71	 PEA-RP 71
up to 4 indoor units MXZ-4B80VA 8.0kW	 MSZ-FB 25/35/50 MSZ-GE 22/25/35/50/60/71	 MFZ-KA 25/35/50	 PCA-RP 50/60/71	 SLZ-KA 25/35/50 PLA-RP 60/71	 SEZ-KD 25/35/50/60/71	 PEA-RP 71
up to 4 indoor units MXZ-4B71VA 7.1kW	 MSZ-FB 25/35/50 MSZ-GE 22/25/35/50/60	 MFZ-KA 25/35/50	 PCA-RP 50/60	 SLZ-KA 25/35/50 PLA-RP 60	 SEZ-KD 25/35/50/60	
up to 3 indoor units MXZ-3B54VA 5.4kW	 MSZ-FB 25/35/50 MSZ-GE 22/25/35/50	 MFZ-KA 25/35/50	 PCA-RP 50	 SLZ-KA 25/35/50	 SEZ-KD 25/35/50	
up to 2 indoor units MXZ-2B52VA 5.2kW	 MSZ-FB 25/35 MSZ-GE 22/25/35	 MFZ-KA 25/35		 SLZ-KA 25/35	 SEZ-KD 25/35	

MXZ-B Series supercedes the current MXZ-A Series. When ordering please check stock availability.

MSZ-FB Series

Deluxe wall mounted

INDOOR UNIT



REMOTE CONTROLLER

OUTDOOR UNIT



MUZ-FB50VA



MUZ-FB25/35VA



OPTIONAL WIRED CONTROLLERS

Plasma Duo Filter Systems


i-see Sensor

QUICK CLEAN

R410A

HEAT PUMP

DC Inverter

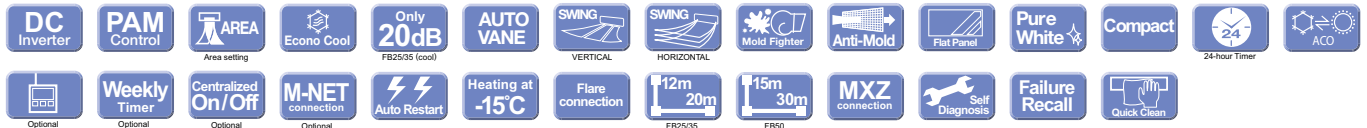

Wall Mounted Type Specifications

Type		Inverter Heat Pump (R410A)				
Model Name		MSZ-FB25VA	MSZ-FB35VA	MSZ-FB50VA		
Indoor Unit		MSZ-FB25VA	MSZ-FB35VA	MSZ-FB50VA		
Outdoor Unit		MUZ-FB25VA	MUZ-FB35VA	MUZ-FB50VA		
Power Supply [V, Phase, Hz]		230V, Single, 50Hz, Powered by Outdoor unit				
Cooling	Capacity [Min.-Rated-Max.]	kW	1.1 - 2.5 - 3.5	1.1 - 3.5 - 4.1	0.9 - 5.0 - 5.8	
	Total Input [Min.-Rated-Max.]	kW	0.260 - 0.525 - 0.970	0.260 - 0.890 - 1.120	0.26 - 1.60 - 2.45	
	Rated EER			4.76	3.93	3.13
		Star Rating		4.5	3.0	1.5
	Running Current [Rated]	A	2.6	4.1	7.1	
	Sound Pressure Level†	IN [Lo-Med-Hi-SH*]	dB(A)	20 - 29 - 36 - 42	20 - 29 - 36 - 43	29 - 39 - 45 - 52
		OUT at 1m (PWL)	dB(A)	46 (59)	47 (60)	54 (67)
Air Volume (IN) [Lo-SH*]	l/S		77 - 187	105 - 247		
Heating	Capacity [Min.-Rated-Max.]	kW	1.5 - 3.2 - 5.5	1.5 - 4.0 - 6.0	0.9 - 6.0 - 7.8	
	Total Input [Min.-Rated-Max.]	kW	0.480 - 0.665 - 1.900	0.480 - 0.900 - 1.900	0.48 - 1.64 - 2.95	
	Rated COP			4.89	4.44	3.66
		Star Rating		5.0	4.0	2.5
	Running Current [Rated]	A	3.1	4.1	7.3	
	Sound Pressure Level†	IN [Lo-Med-Hi-SH*]	dB(A)	20 - 29 - 36 - 43	21 - 29 - 36 - 44	27 - 37 - 43 - 50
		OUT at 1m (PWL)	dB(A)	46 (59)	50 (63)	56 (69)
Air Volume (IN) [Lo-SH*]	l/S	75 - 202	78 - 208	92 - 247		
Starting Current	A	3.1	4.1	7.3		
Max. Running Current	A	10	10	16		
Indoor	Input [Rated] Cooling/Heating	W	25 / 30	27 / 32	60 / 60	
	Dimensions [HxWxD]	mm	295 x 798 x 257			
	Weight	kg	12			
Outdoor	Dimensions [HxWxD]	mm	550 x 800 x 285	850 x 840 x 330		
	Weight	kg	36	55		
	Breaker Size	A	10	16		
Ext. Piping	Diameter (Gas/Liquid)	mm	9.52 / 6.35	12.7 / 6.35		
	Max. Length/Height	m	20 / 12	30 / 15		
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ 46			
	Heating	°C	-15 ~ 24			

*SH = Super High

†Indoor sound pressure level generally measured at 1.5 metres. For exact details see Technical Data Manual.

MSZ-GE Series

Wall mounted

INDOOR UNIT



MSZ-GE/25/35/50+



MSZ-GE60/71/80



OUTDOOR UNIT



MUZ-GE60/71/80 / MUZ-GE50VA



MUZ-GE25/35VA



OPTIONAL WIRED CONTROLLERS



HEAT PUMP

DC Inverter

QUICK CLEAN



Wall Mounted Type Specifications

Type		Inverter Heat Pump (R410A)							
Model Name		MSZ-GE25VA	MSZ-GE35VA	MSZ-GE50VA	MSZ-GE60VA	MSZ-GE71VA	MSZ-GE80VA		
Indoor Unit		MSZ-GE25VA	MSZ-GE35VA	MSZ-GE50VA	MSZ-GE60VA	MSZ-GE71VA	MSZ-GE80VA		
Outdoor Unit		MUZ-GE25VA	MUZ-GE35VA	MUZ-GE50VA	MUZ-GE60VA	MUZ-GE71VA	MUZ-GE80VA		
Power Supply [V, phase, Hz]		230V, Single, 50Hz, Power by Outdoor unit							
Cooling	Capacity	Rated	kW	2.5	3.5	5.0	6.0	7.1	8.0
		Min. - Max.	kW	1.1 - 3.5	1.4 - 3.9	1.4 - 5.4	1.5 - 7.5	2.4 - 8.7	2.4 - 9.2
	Total Input [Min.-Rated-Max.]		kW	0.205 - 0.560 - 1.145	0.320 - 1.010 - 1.560	0.320 - 1.640 - 2.060	0.280 - 1.760 - 2.380	0.570 - 2.130 - 3.370	0.570 - 2.560 - 3.580
	Rated EER			4.46	3.47	3.05	3.40	3.33	3.12
	Star Rating			4.0	2.0	1.5	2.0	2.0	1.5
	Running Current [Rated]		A	2.9	4.7	7.4	7.8	9.4	11.3
	Sound Pressure Level†		Indoor Unit [Quiet-Low-Mid-Hi-SH*]	dB(A)	19 - 21 - 29 - 36 - 42	19 - 22 - 30 - 36 - 43	28 - 33 - 38 - 44 - 49	29-37-41-45-49	30-37-41-45-49
Air Volume		Outdoor at 1m (PWL)	dB(A)	46 (58)	47 (61)	54 (69)	55 (69)	55 (69)	55 (69)
Air Volume		Indoor Unit [Quiet-Low-Mid-Hi-SH*]	L/S	68 - 80 - 111 - 152 - 188	68 - 80 - 111 - 152 - 212	108 - 130 - 160 - 198 - 252	163-190-225-262-305	162-192-222-257-298	162-192-222-257-298
Air Volume		Outdoor Unit [Rated]	L/S	543	612	817	682	835	920
Heating	Capacity	Rated	kW	3.2	4.0	5.8	6.8	8.1	9.0
		Min. - Max.	kW	1.3 - 4.5	1.4 - 4.8	1.4 - 7.2	2.0 - 9.3	2.2 - 9.9	2.2 - 11.1
	Total Input [Min.-Rated-Max.]		kW	0.255 - 0.730 - 1.200	0.340 - 1.030 - 1.550	0.320 - 1.650 - 2.490	0.460 - 1.770 - 2.940	0.520 - 2.110 - 3.250	0.520 - 2.540 - 3.650
	COP			4.38	3.88	3.52	3.84	3.83	3.54
	Star Rating			4.0	3.0	2.5	3.0	2.5	2.5
	Running Current [Rated]		A	3.8	4.8	7.4	7.8	9.5	11.2
	Sound Pressure Level†		Indoor Unit [Quiet-Low-Mid-Hi-SH*]	dB(A)	19 - 21 - 29 - 36 - 42	19 - 22 - 30 - 36 - 43	28 - 33 - 37 - 43 - 48	29-37-41-45-49	30-37-41-45-49
Air Volume		Outdoor at 1m (PWL)	dB(A)	48 (59)	48 (62)	56 (69)	55 (69)	55 (69)	55 (69)
Air Volume		Indoor Unit [Quiet-Low-Mid-Hi-SH*]	L/S	68 - 80 - 110 - 152 - 192	68 - 80 - 111 - 152 - 192	108 - 130 - 160 - 203 - 242	163-190-225-262-305	170-192-222-257-298	170-192-222-257-298
Air Volume		Outdoor Unit [Rated]	L/S	578	578	817	820	803	803
Operating Current (max.)			A	7.4	8.6	13.0	14.5	16.6	16.6
Indoor Unit	Input	Rated	kW	0.022	0.029	0.043	0.061	0.065	0.065
	Operating Current (max.)		A	0.4	0.4	0.5	0.52	0.55	0.55
	Dimensions	H - W - D	mm	295 - 798 - 232	295 - 798 - 232	295 - 798 - 232	325 - 1100 - 238	325 - 1100 - 238	325 - 1100 - 238
	Weight		kg	10	10	10	16	16	16
Outdoor Unit	Dimensions	H - W - D	mm	550 - 800 - 285	550 - 800 - 285	850 - 840 - 330	880 - 840 - 330	880 - 840 - 330	880 - 840 - 330
	Weight		kg	30	30	54	50	53	53
	Operating Current (max.)		A	7.0	8.2	12.5	7.46	8.95	10.75
	Breaker Size		A	10	10	16	20	20	20
Ext. Piping	Diameter	Liquid (φ) / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length		m	20	20	30	30	30	30
	Max. Height		m	12	12	15	15	15	15
Guaranteed Operating Range [Outdoor]	Cooling		°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
	Heating		°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

* SH = Super High

† Indoor sound pressure level generally measured at 1.5 metres. For exact details see Technical Data Manual.

MFZ Series

Compact console

INDOOR UNIT



REMOTE CONTROLLER



OUTDOOR UNIT



SUZ-KA50VA2



SUZ-KA25/35VA2



OPTIONAL WIRED CONTROLLERS

R4-10A

HEAT PUMP

DC Inverter



Console Type Specifications

Type		Inverter Heat Pump (R410A)				
Model Name		MFZ-KA25VA	MFZ-KA35VA	MFZ-KA50VA		
Indoor Unit		MFZ-KA25VA	MFZ-KA35VA	MFZ-KA50VA		
Outdoor Unit		SUZ-KA25VA2	SUZ-KA35VA2	SUZ-KA50VA2		
Power Supply [V, Phase, Hz]		230V, Single, 50Hz, Outdoor unit power supply				
Cooling	Capacity [Min. - Rated - Max.]	kW	0.9 - 2.5 - 3.4	0.9 - 3.5 - 3.9	0.9 - 4.8 - 5.4	
	Total Input [Min. - Rated - Max.]	kW	0.19 - 0.58 - 0.94	0.19 - 1.09 - 1.25	0.19 - 1.55 - 1.98	
	Rated EER			4.31	3.33	3.10
		Star Rating		3.0	2.0	1.5
	Running Current [Rated]	A	2.8	5.0	7.0	
	Sound Pressure Level†	IN [Lo - Med - Hi - SH*]	dB(A)	22 - 27 - 32 - 37	23 - 28 - 33 - 38	32 - 35 - 39 - 43
		OUT at 1m (PWL)	dB(A)	46 (59)	47 (61)	53 (68)
Air Volume (IN) [Lo - SH]	ℓ/S	80 - 145	83 - 152	118 - 178		
Heating	Capacity [Min. - Rated - Max.]	kW	0.9 - 3.4 - 5.1	0.9 - 4.0 - 6.2	0.9 - 6.0 - 7.9	
	Total Input [Min. - Rated - Max.]	kW	0.19 - 0.835 - 1.91	0.19 - 1.10 - 2.24	0.19 - 1.86 - 2.81	
	Rated COP			4.07	3.64	3.23
		Star Rating		3.0	2.5	2.0
	Running Current [Rated]	A	4.0	5.0	8.5	
	Sound Pressure Level†	IN [Lo - Med - Hi - SH*]	dB(A)	22 - 27 - 32 - 37	25 - 28 - 33 - 38	32 - 35 - 39 - 44
		OUT at 1m (PWL)	dB(A)	46 (59)	48 (61)	55 (68)
Air Volume (IN) [Lo - SH*]	ℓ/S	83 - 152	87 - 158	123 - 197		
Starting Current	A	4.0	5.0	8.5		
Max. Running Current	A	6.4	9.4	16.2		
Indoor	Input [Rated]	W	25	25	25	
	Dimensions [H x W x D]	mm	600 x 700 x 200	600 x 700 x 200	600 x 700 x 200	
	Weight	kg	14	14	14	
Outdoor	Dimensions [H x W x D]	mm	550 x 800 x 285	550 x 800 x 285	850 x 840 x 330	
	Weight	kg	33	37	53	
	Breaker Size	A	10	10	10	
Ext. Piping	Diameter (Gas / Liquid)	mm	9.52 / 6.35	9.52 / 6.35	12.7 / 6.35	
	Max. Length / Height	m	20 / 12	20 / 12	30 / 15	
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ 46	-10 ~ 46	-10 ~ 43	
	Heating	°C	-10 ~ 24	-10 ~ 24	-10 ~ 24	

*SH = Super High

†Indoor sound pressure level generally measured at 1.5 metres. For exact details see Technical Data Manual.

SLZ-KA Series

Compact ceiling cassette



INDOOR UNIT



OUTDOOR UNIT



SUZ-KA50VA2



SUZ-KA25/35VA2

OPTIONAL
CONTROLLERS



WIRED



OR WIRELESS

R410A

HEAT PUMP

DC
Inverter



4way Cassette Type Specifications


Type			Inverter Heat Pump (R410A)			
Model Name			SLZ-KA25VA	SLZ-KA35VA	SLZ-KA50VA	
Indoor Unit			SLZ-KA25VA(L)*	SLZ-KA35VA(L)*	SLZ-KA50VA(L)*	
Outdoor Unit			SUZ-KA25VA2	SUZ-KA35VA2	SUZ-KA50VA2	
Power Supply [V, Phase, Hz]			230V, Single, 50Hz, Outdoor unit power supply			
Cooling	Capacity [Min. - Rated - Max.]	kW	0.9 - 2.5 - 3.2	1.0 - 3.5 - 3.9	1.1 - 4.6 - 5.2	
	Total Input [Min. - Rated - Max.]	kW	0.25 - 0.68 - 1.00	0.27 - 1.04 - 1.33	0.49 - 1.53 - 2.13	
	Rated EER			3.68	3.37	3.01
		Star Rating		2.0	1.5	1.0
	Running Current [Rated]	A	3.70	5.00	6.90	
	Sound Pressure Level	IN [Lo - Med - Hi]	dB(A)	28 - 31 - 37	29 - 33 - 38	30 - 34 - 39
		OUT at 1m (PWL)	dB(A)	46 (59)	47 (60)	53 (68)
Air Volume (IN) [Lo - Mid - Hi]	ℓ/S	133 - 150 - 167	133 - 150 - 183	133 - 150 - 183		
Heating	Capacity [Min. - Rated - Max.]	kW	0.9 - 3.0 - 4.5	0.9 - 4.0 - 5.0	0.9 - 5.0 - 6.5	
	Total Input [Min. - Rated - Max.]	kW	0.17 - 0.85 - 1.36	0.25 - 1.09 - 1.46	0.39 - 1.55 - 3.36	
	Rated COP			3.76	3.67	3.22
		Star Rating		2.0	2.0	1.5
	Running Current [Rated]	A	4.30	5.1	7.10	
	Sound Pressure Level	IN [Lo - Med - Hi]	dB(A)	28 - 31 - 37	29 - 33 - 38	30 - 34 - 39
		OUT at 1m (PWL)	dB(A)	46 (59)	48 (61)	55 (68)
Air Volume (IN) [Lo - Mid - Hi]	ℓ/S	133 - 150 - 167	133 - 150 - 183	133 - 150 - 183		
Starting Current	A	3.65	4.75	6.75		
Max. Running Current	A	8.16	9.18	16		
Indoor	Input [Rated]	W	75	85	85	
	Dimensions [H x W x D]	mm	208 x 570 x 570	208 x 570 x 570	208 x 570 x 570	
		Panel	mm	20 x 650 x 650	20 x 650 x 650	20 x 650 x 650
	Weight (Panel)	kg	16.5 (3)	16.5 (3)	16.5 (3)	
Outdoor	Dimensions [H x W x D]	mm	550 x 800 x 285	550 x 800 x 285	850 x 840 x 330	
	Weight	kg	33	37	53	
	Breaker Size	A	10	10	20	
Ext. Piping	Diameter (Gas / Liquid)	mm	9.52 / 6.35	9.52 / 6.35	12.7 / 6.35	
	Max. Length / Height	m	20 / 12	20 / 12	30 / 30	
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ 46	-10 ~ 46	-10 ~ 43	
	Heating	°C	-15 ~ 24	-15 ~ 24	-15 ~ 24	

* SLZ-KA VAL is with a wireless remote controller.

SEZ-KD Series

Compact Bulkhead

INDOOR UNIT

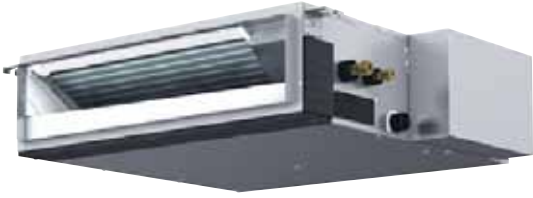

OUTDOOR UNIT



SUZ-KA71VA2

SUZ-KA50/60VA2

SUZ-KA25/35VA2



OPTIONAL CONTROLLERS



WIRED OR WIRELESS

R410A

HEAT PUMP

DC Inverter



Bulkhead Type Specifications

Type		Inverter Heat Pump (R410A)						
Model Name		SEZ-KD25VA	SEZ-KD35VA	SEZ-KD50VA	SEZ-KD60VA	SEZ-KD71VA		
Indoor Unit		SEZ-KD25VA(L)*	SEZ-KD35VA(L)*	SEZ-KD50VA(L)*	SEZ-KD60VA(L)*	SEZ-KD71VA(L)*		
Outdoor Unit		SUZ-KA25VA2	SUZ-KA35VA2	SUZ-KA50VA2	SUZ-KA60VA2	SUZ-KA71VA2		
Power Supply [V, Phase, Hz]		230V, Single, 50Hz, Outdoor unit power supply						
Cooling	Capacity [Min. - Rated - Max.]	kW	0.9 - 2.5 - 3.2	1.0 - 3.5 - 3.9	1.1 - 5.0 - 5.6	1.1 - 5.5 - 6.3	0.9 - 7.1 - 8.3	
	Total Input [Min. - Rated - Max.]	kW	0.24 - 0.75 - 1.07	0.26 - 1.09 - 1.35	0.51 - 1.64 - 2.33	0.50 - 1.86 - 2.52	0.77 - 2.36 - 3.72	
	Rated EER		3.33	3.39	3.11	3.01	3.01	
	Running Current [Rated]	A	3.90	5.10	7.40	8.30	10.60	
	Sound Pressure Level†	IN [Lo - Med - Hi]	dB(A)	23 - 26 - 30	23 - 28 - 33	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40
		OUT at 1m (PWL)	dB(A)	46 (59)	47 (60)	53 (68)		
Air Volume (IN) [Lo - Mid - Hi]	ℓ/S	92 - 117 - 150	117 - 150 - 183	167 - 208 - 250	200 - 250 - 300	200 - 267 - 333		
Heating	Capacity [Min. - Rated - Max.]	kW	0.9 - 3.0 - 4.5	0.9 - 4.0 - 5.0	1.1 - 6.0 - 7.2	0.9 - 7.0 - 8.0	0.9 - 8.1 - 10.4	
	Total Input [Min. - Rated - Max.]	kW	0.26 - 0.83 - 1.35	0.24 - 1.13 - 1.52	0.47 - 1.81 - 3.45	0.32 - 2.11 - 2.69	0.64 - 2.18 - 3.67	
	Rated COP		3.61	3.72	3.54	3.51	3.72	
	Running Current [Rated]	A	4.20	5.20	8.10	9.40	9.70	
	Sound Pressure Level†	IN [Lo - Med - Hi]	dB(A)	23 - 26 - 30	23 - 28 - 33	30 - 34 - 37	30 - 34 - 38	30 - 35 - 40
		OUT at 1m (PWL)	dB(A)	46 (59)	48 (61)	55 (68)		
Air Volume (IN) [Lo - Mid - Hi]	ℓ/S	92 - 117 - 150	117 - 150 - 183	167 - 208 - 250	200 - 250 - 300	200 - 267 - 333		
Starting Current		A	3.95	5.10	8.30	9.20	11.05	
Max. Running Current		A	8.59	9.69	16.7	16.7	16.93	
Indoor	Input [Rated]	W	40	50	70	100		
	Dimensions [H x W x D]	mm	200 x 790 x 700	200 x 990 x 700		200 x 1,190 x 700		
	Weight	kg	18	21	23	27		
	Static Pressure	Pa	5 - 15 - 35 - 50					
Outdoor	Dimensions [H x W x D]	mm	550 x 800 x 285		850 x 840 x 330			
	Weight	kg	33	37	53	53	58	
	Breaker Size	A	10		20			
Ext. Piping	Diameter (Gas / Liquid)	mm	9.52 / 6.35		12.7 / 6.35	15.88 / 6.35	15.88 / 9.52	
	Max. Length / Height	m	20 / 12		30 / 30			
Guaranteed Operating Range [Outdoor]	Cooling	°C	-10 ~ 46		-10 ~ 43			
	Heating	°C	-15 ~ 24					

*SEZ-KD VAL is with a wireless remote controller.

†Indoor sound pressure level generally measured at 1.5 metres. For exact details see Technical Data Manual.

Our advanced control technology means controlling your comfort is easy

New MA Remote Controller (optional)

Our state of the art Controller allows you to get the most out of your Mitsubishi Electric Air Conditioning System.

Take Control At Your Fingertips


Simply open the front panel and total control of your comfort is there at the touch of a button. From temperature control to automatic stop/start on a daily or weekly basis, it's all there at your fingertips.

Easy To Read Display

The large type in the dot Liquid Crystal Display allows the status of your system to be viewed at a glance, day or night.

While most remote controls can be confusing our control has been specifically designed to be more user friendly.

The Slimline styling has been designed to fit unobtrusively with any décor. The only visible buttons are those most frequently used: On/Off and Temperature Up/Down.

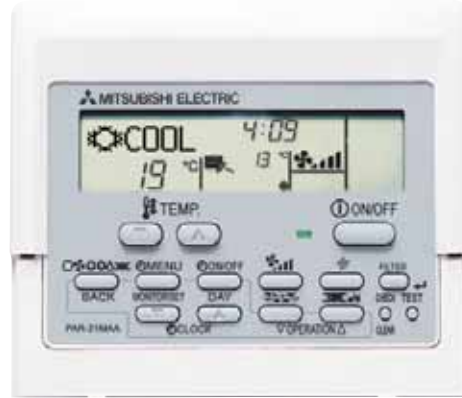

Industry First! Multi-language Display

To aid communication today's multicultural society, the control can be switched to 8 different languages.



Operation Lock

The operation of all buttons on the control can be locked with the exception of the On/Off button.

This stops little children or any unauthorised person changing temperatures or settings that may in turn waste valuable energy and increase running costs.

Weekly Timer

The Weekly Timer allows you to programme the unit with up to 8 different automatic On/Off and Temperature changes per day, 7 days in advance, which means your home or office can be at the optimum temperature whenever required.




Effective Energy Saving Control

Limiting the set temperature range

Setting upper and lower temperature limits prevents the unit from excessive heating and cooling, thereby saving energy further and reducing your power bill.

Setting Example (Restaurant in summer time)

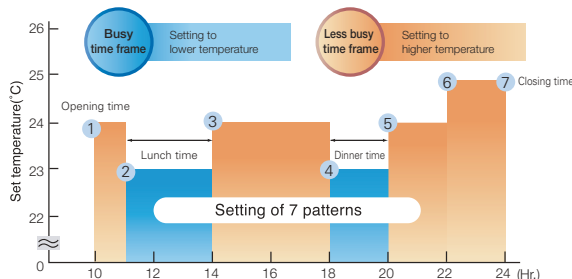


*Result of cooperative study with Japan Facility Solution Co., Ltd.

Setting the temperature to "1°C higher in cooling" while "1°C lower in heating" results in about 10% energy saving.



*Based on our internal calculation

Interface for Extended Control for Inverter M Series

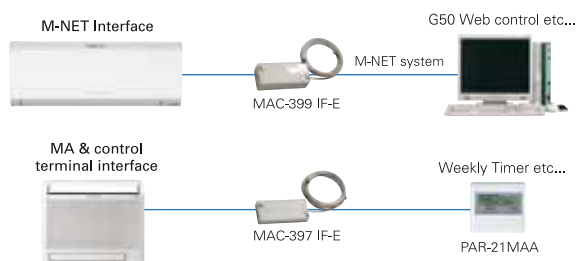

Centralized On/Off remote controller




- *On/Off control only
- *Up to 8 indoor units can be controlled

MAC-821SC-E (MAC-397 IF-E required)

MXZ-VA Series

Multiple indoor units can be connected to a single outdoor unit

- Connect from 2 to 5 indoor units
- Choose from many combination patterns
- Energy saving
- Quiet operation
- Compact outdoor unit saves space

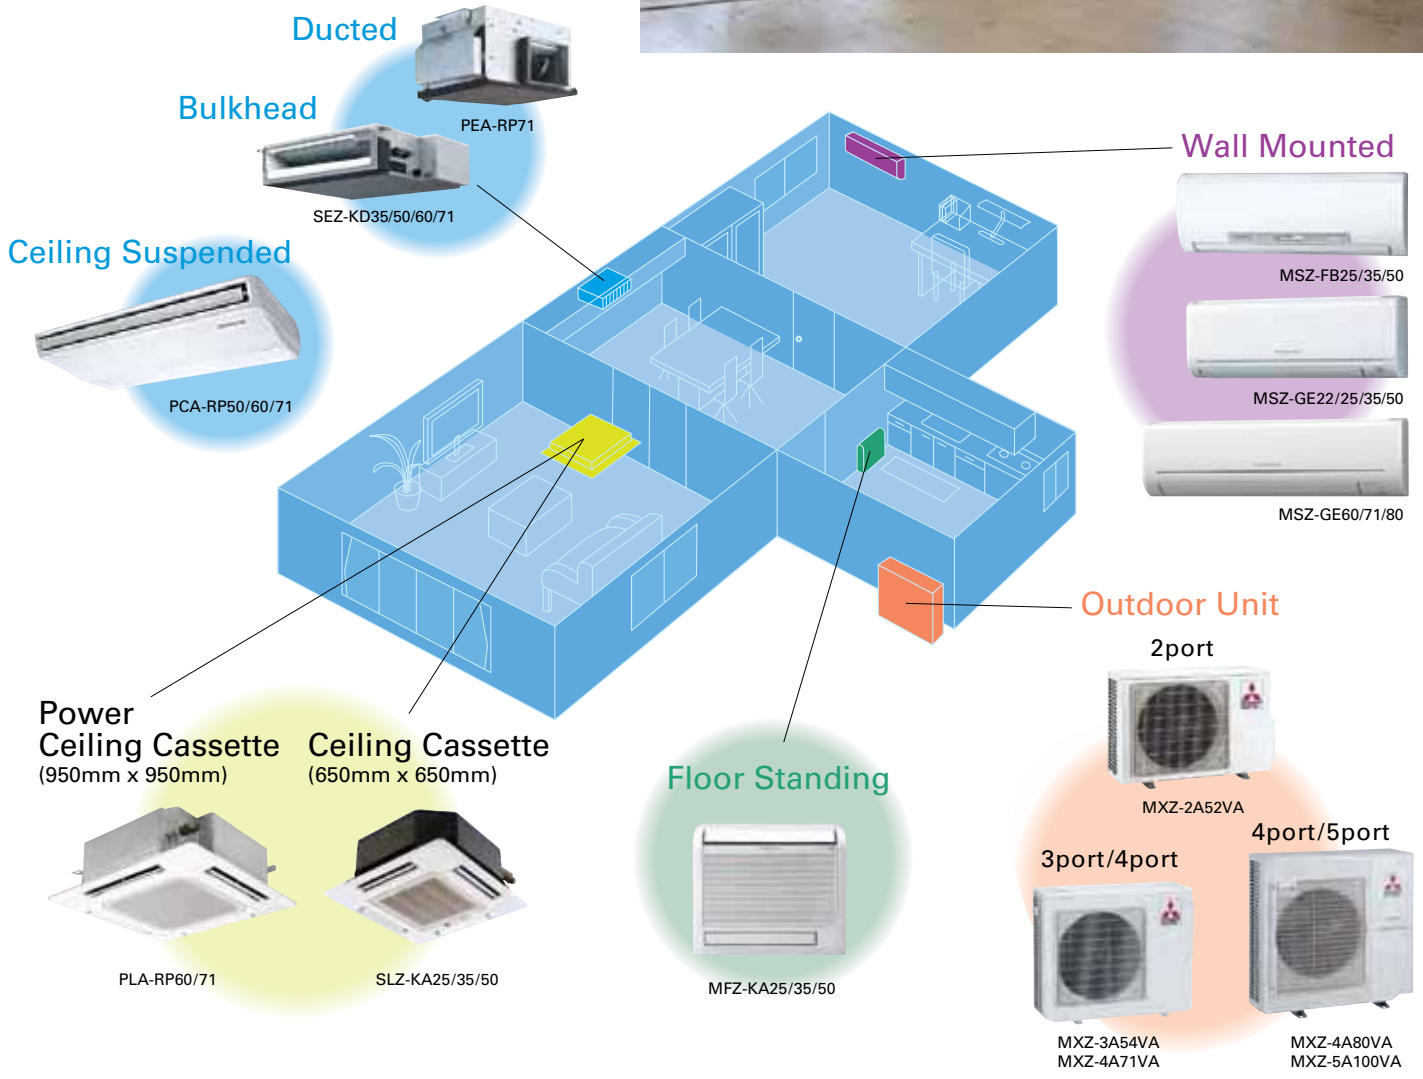

Compact Outdoor Unit Saves Space

MXZ Series can be connected to 2, 3, 4 or 5 indoor units, optimizing use of outdoor space and enhancing exterior aesthetics.

Select From Wide Range of Stylish Indoor Units

The key to attractive installation and optimum indoor dimension use. Select the ideal indoor units from 26 models in 8 types: wall mounted, console, ducted, ceiling cassette and bulkhead.

	Wall Mounted				Floor Standing	Bulkhead	Ducted	Ceiling Cassette			Ceiling Suspended						
	MSZ-F		MSZ-G					SLZ	PLA	PCA							
	25	35	50	22	25	35	50	60	71	25	35	50	60	71	50	60	71
MXZ-2A52VA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MXZ-3A54VA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MXZ-4A71VA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MXZ-4A80VA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MXZ-5A100VA	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Energy Saving with High EER and COP

Thanks to inverter technology, we have realised a higher energy efficiency COP of 4.79 (MXZ-4B71VA in heating) for maximum comfort.

COP
4.79

Quiet Operation (Silent Mode)*


With the MXZ outdoor unit, operating noise (outdoor) is just 44dB* (MXZ-3B54/4B80 in cooling mode). In combination with the MSZ-GE25/35VA, indoor noise can also be reduced to a quiet 19dB.



*Silent mode needs to be set when installed.

Advanced Remote Controller

The optional wired remote controller (PAR-21MAA*) with a weekly timer function enables eight separate pattern settings in a single day. Use the optional Centralised On/Off Controller (MAC-821SC-E*) to regulate all rooms. On/Off selection and operation status confirmation is possible with a single controller.



*Requires optional interface (MAC-397 IFE)

Fix Operation Mode

“Fix Operation Mode” can be selected to prevent operating in an erroneous mode. This is especially convenient in places where many people gather, such as in hotels.


Operable under Low Outdoor Temperatures

Even when it is as cold as -15°C outside, both heating and cooling operation are possible. Cooling may be suitable in winter for crowded spaces such as in pubs.

Longer Piping Length

To ease installation work at any site, piping is extendable up to 80 metres* in total length and 15 metres in height (additional refrigerant charge may be required).

*MXZ-5B100VA

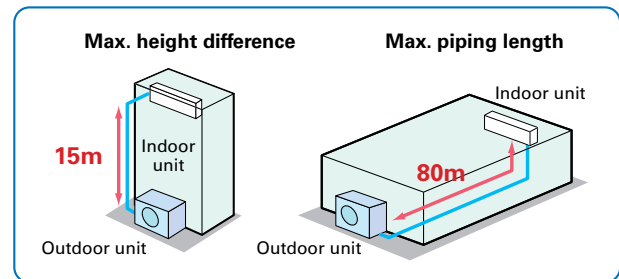

MXZ Specifications

Type				Up to 2 indoor units	Up to 3 indoor units	Up to 4 indoor units		Up to 5 indoor units	
Model Name				MXZ-2B52VA	MXZ-3B54VA	MXZ-4B71VA	MXZ-4B80VA	MXZ-5B100VA	
Power Supply [V, Phase, Hz, Source]				230, Single, 50, Outdoor Power Supply					
Cooling	Capacity	Rated	kW	5.2	5.4	7.1	8.0	10.0	
		Min. - Max.	kW	1.1 - 6.0	2.9 - 6.8	3.7 - 8.8	3.7 - 9.2	3.9 - 11.0	
	Power Input [In+Out]		W	1,358	1,256	1,768	2,071	2,910	
	COP [In+Out]			3.83	4.30	4.02	3.86	3.44	
	Running Current [In+Out]		A	6.09	5.52	7.76	9.10	12.78	
	Sound Level [Outdoor]	Silent - High	dB(A)	45 - 49	45 - 47	45 - 48	44 - 46	46 - 51	
Air Volume [Outdoor]		ℓ/s	548	702	702	702	943		
Heating	Capacity	Rated	kW	6.4	7.0	8.6	9.4	12.0	
		Min. - Max.	kW	1.0 - 7.0	2.6 - 9.0	3.4 - 10.7	3.4 - 11.6	4.1 - 14.0	
	Power Input [In+Out]		W	1,656	1,534	1,797	2,022	2,950	
	COP [In+Out]			3.86	4.56	4.79	4.65	4.07	
	Running Current [In+Out]		A	7.42	6.74	7.89	8.88	12.96	
	Sound Level [Outdoor]	Silent - High	dB(A)	48 - 50	48 - 51	48 - 52	46 - 48	47 - 54	
Air Volume [Outdoor]		ℓ/s	555	717	717	730	988		
Outdoor	Dimensions	Height	mm	550	710	710	900	900	
		Width	mm	800	840	840	900	900	
		Depth	mm	285	330	330	320	320	
	Weight	kg	38	57	58	67	68		
Ext. Piping	Diameter	Liquid (φ)	mm ²	6.35 x 2	6.35 x 3	6.35 x 4	6.35 x 4	6.35 x 5	
		Gas (φ)	mm ²	9.52 x 2	9.52 x 3	9.52 x 3 + 12.7 x 1	9.52 x 3 + 12.7 x 1	9.52 x 4 + 12.7 x 1	
	Max. Length		Total - Each	m	30 - 20	50 - 25	60 - 25	70 - 25	80 - 25
	Max. Height			m	15 / 10*	15 / 10*	15 / 10*	15 / 10*	15 / 10*
Guaranteed Operating Range [Outdoor]	Cooling	°C		-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
	Heating	°C		-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	

(NOTE) Model name shows rated cooling capacity when max. quantity of indoor units are connected. MXZ-5B100VA: 10kW at rated connected with 5 indoor units.

Power input, running current and COP are the figures when connected with below indoor units.
 MXZ-2B52VA → MSZ-GE35VA×2
 MXZ-3B54VA → MSZ-GE25VA×3
 MXZ-4B71VA → MSZ-GE25VA×4
 MXZ-4B80VA → MSZ-GE35VA×4
 MXZ-5B100VA → MSZ-GE25VA×5

*If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m.

(Rating Conditions) Cooling: Indoor 27°C, D.B./19°C, W.B. Outdoor 35°C, D.B.
 Heating: Indoor 20°C, D.B./15°C, W.B. Outdoor 7°C, D.B./6°C, W.B.

Features Guide

Energy Saving

- DC Inverter** DC Inverter
- PAM Control** PAM control
- AREA** AREA setting
- Econo Cool** Econo Cool
- 'I FEEL' Control**
- i-see Sensor** i-see Sensor
- i save Mode**

Comfort

- Only 19dB** Ultra Quiet : Only 19dB
- VERTICAL AIRFLOW** Vertical Airflow
- AUTO VANE** Auto Vane
- SWING** Swing (vertical vane)
- SWING** Swing (horizontal vane)
- Wide Long** Wide & Long Airflow
- Powerful** Powerful Mode

Fresh Air

- Plasma Duo Filter Systems** Plasma Duo Filter Systems
- Nano Platinum** Nano Platinum Filter
- Anti-Allergy Enzyme** Anti-Allergy Enzyme Filter
- Catechin** Catechin Filter
- Anti-Mold** Anti-Mold Air Cleaning Filter
- Air Cleaning** Air Cleaning Filter
- Long Life** Long Life Filter
- Mold Fighter** Mould Fighter

Design

- Flat Panel** Flat Panel
- Pure White** Pure White
- 200mm Compact** Only 200mm in Height
- 2x2 size** Suitable for 2 x 2 Ceiling (650 x 650mm)
- Compact** Compact Size

Convenience

- 24-hour Timer** 24-hour Timer
- i save Mode**
- Weekly Timer** Weekly Timer (8 patterns/day x 7 days)
- PAR-21MAA Connectable**
- Centralized On/Off Control** Centralized On/Off Control
- M-NET connection** M-NET Connection
- ACO** Auto Change Over
- Auto Restart** Auto Restart
- Cooling at 4°C/-10°C** Wide Cooling Temperature Range
- Cooling at -10°C** Low Temperature Cooling
- Heating at -15°C** Heating at -15°C is possible

Installation & Maintenance

- Failure Recall** Failure Recall Function
- Easy Installation** Easy Installation with an Installation Plate
- Quick Clean** Quick Clean Body
- Flare connection** Easy & Simple Flare Connection
- 12m 20m** Long-Length Piping
- MXZ connection** MXZ Connectable
- Self Diagnosis** Self-Diagnosis Function

Products in this brochure contain R410A refrigerant. Please refer to installation instructions before installation or servicing of this product.

Only licensed persons and companies qualified and experienced in the installation, service and repair of products containing refrigerants should be permitted to do so. The buyer must ensure that the person and/or company who is to install, service or repair the air conditioner has the necessary licences, qualifications and experience to perform the work. Suitable access for warranty and service is required. Refer to conditions of warranty on the Mitsubishi Electric website.

For future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.



Diamond Dealer Call Centre 1300 722 228



Certificate Number
49385



Certificate Number
EC97J1132

Mitsubishi Electric Shizuoka Works acquired ISO9001 certification under Series 9000 of the International Standard Organization (ISO) based on a review of Quality warranties for the production of air conditioning equipment. The plant also acquired environmental management system standard ISO 14001 certification.



MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

MITSUBISHI ELECTRIC AUSTRALIA PTY LTD.

www.mitsubishielectric.com.au (Incorporated in New South Wales) ABN 58 001 215 792

New South Wales
348 Victoria Road
Rydalmere NSW 2116
Phone 02 9684 7555
Fax 02 9898 1043

Newcastle
271 Brunker Road,
Adamstown NSW 2289
Phone 02 4978 7813
Fax 02 4978 7899

Canberra
Mobile 0408 650 822
Fax 02 6297 9067

Victoria/Tasmania
Omnic Business Park
Building 28
270 Ferntree Gully Road
Notting Hill vic 3168
Phone 03 9535 7800
Fax 03 9535 7801

**Queensland/
Northern Territory**
Unit 12, 469 Nudgee Road
Hendra QLD 4011
Phone 07 3623 2000
Fax 07 3630 1888

North QLD - Townsville
Mitsubishi Electric Office
302 Woolcock Street
Garbutt, QLD 4814
Phone 07 4728 5223
Fax 07 4728 5102

South Australia
77 Port Road
Hindmarsh SA 5007
Phone 08 8340 2000
Fax 08 8340 0555

Western Australia
Unit 5, 329 Collier Road
Bassendean WA 6054
Phone 08 9377 3400
Fax 08 9377 3499